

Description

The strobe sounder is an ideal alternative to fire bells and for external use. It is housed in an attractive horn comprises of flame retardant ABS. Eight selectable tones and a volume control are featured to meet most requirements.


The strobe is also available with transparent poly-carbonate front which will provide both visual and audible alarm.




Specifications


Color	Red
Operating Voltage	12~30 V DC
Operating current	≤40mA
Operating temperature	-20°C~+60°C
Waterproof rating	IP65
Flash	60±3 times/min
Sound	8 different tones
Operating humidity	≤95% RH
Sound pressure	≥105db(at 1meter)
Flash intensity	≥1.2WS
Size	124*130*100mm
Weight/pcs	0.36kg

Dimensions

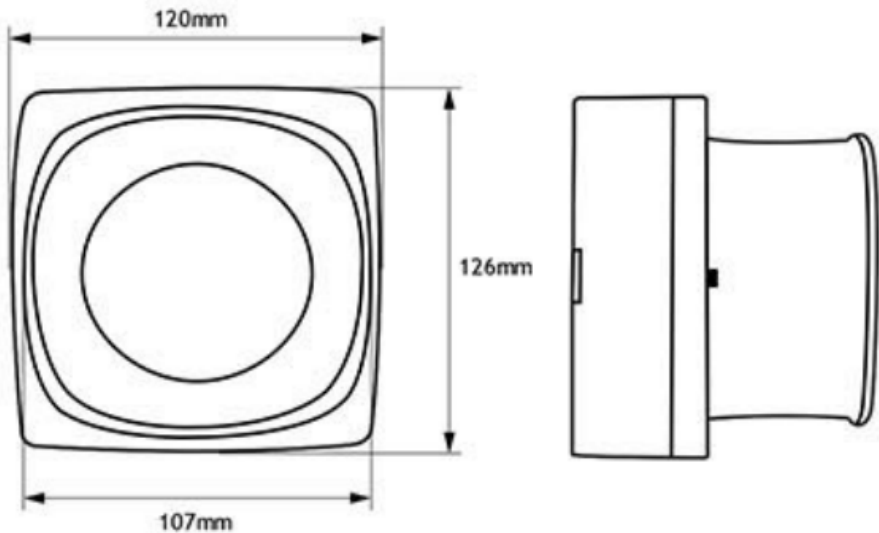

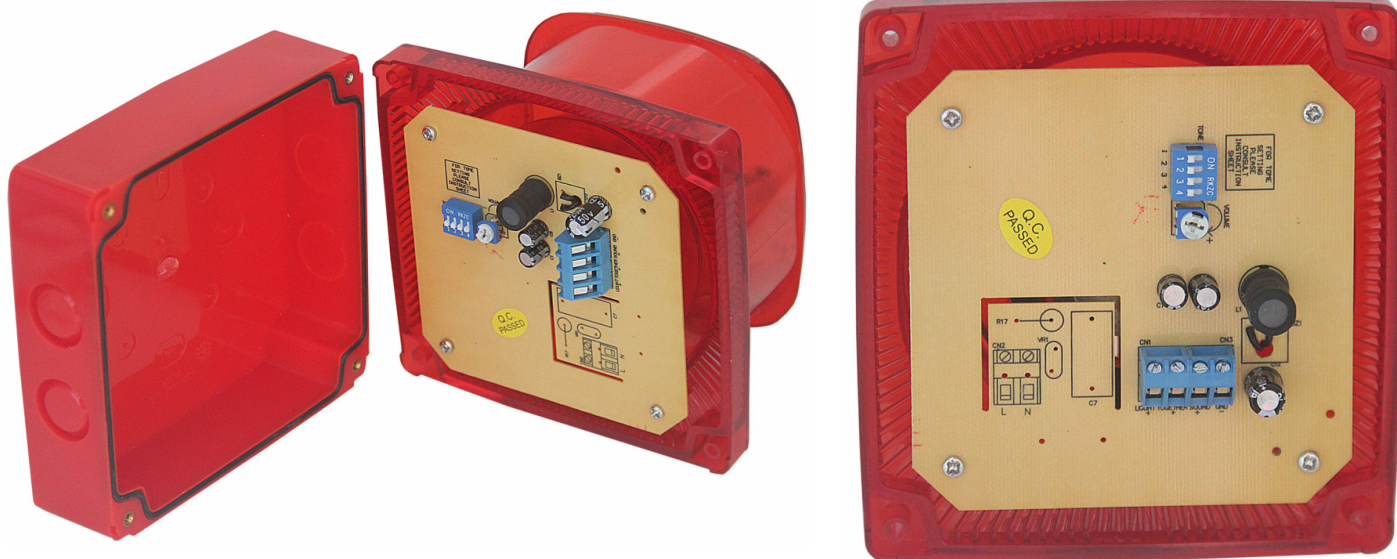


Connection Diagram

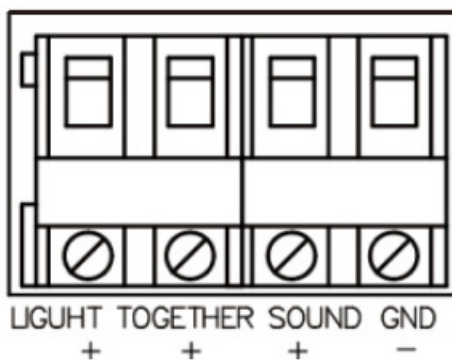

- 1.Power positive LIGUHT, negative GND, Fash light working, alarm no working.
- 2.Power positive TOGETHER, negative GND, Fash light and alarm same working.
- 3.Power positive SOUND , negative GND, sound working, Fash light no working.

Products Adjust Volume Description

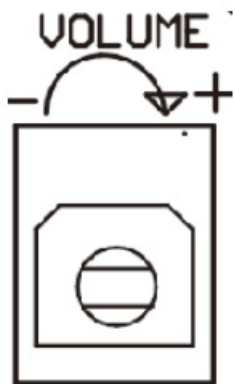

Turn“-” reduce the volume
Turn“+” increase the volume

Features

- 8 adjustable tones
- Adjustable volume

Products Sound Optional

Code setting	Operating Voltage DC12V, switch "NO" to "0"		
Switch 123	Sound species	Pulse description	DB level
LLL/000	119	High level 180uS,low level max:1800uS,min:880us	116+/- 2db
HHL/110	Last"di" 0.7hz	High level 85uS,low level 890us	110+/- 2db
LHL/010	Sounding"du"	High level 115uS,low leve1400us	114+/- 2db
HLL/100	High sound 119	High level 105uS,low level max:1150uS,min:960us	115+/- 2db
LHH/011	Nomal 120	High level 180uS,low level max:2090uS,min:1620us	116+/- 2db
HLH/101	High sounding "di"	High level 95uS,low level 930us	111+/- 2db
LLH/001	120 with fast	High level 180uS,low level max:2090uS,min:1620us	114+/- 2db
HHH/111	High sound 120 with fast	High level 140uS,low level max:1100uS,min:950us	116+/- 2db